




**Operating Instructions
Portable Ultrasonic Flowmeter**

Arrow Hunter PLUS BTU Version

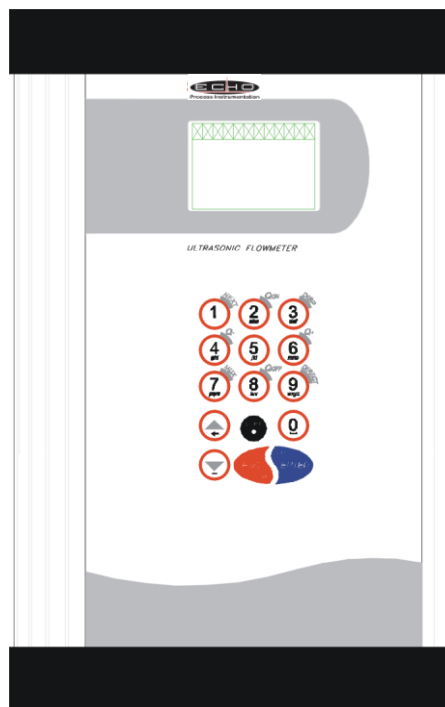

Arrow Hunter PLUS B.T.U. Operating Instructions

Table of Contents

	Page
1 Safety instructions, legal requirements, warranty, return policy ...	4
1.1 Symbols used in these operating instructions	
1.2 Safety instructions	
1.3 Warranty	
1.4 Return policy	
1.5 Legislative requirements	
2 Introduction	7
3 Installation	8
3.1 Unpacking and storage	
3.1.1 <i>Unpacking</i>	
3.1.2 <i>Storage and preservation</i>	
3.1.3 <i>Identification of components</i>	
3.2 Clamp-on sensor installation	
3.3 Installation location	
3.4 Pipe preparation	
3.5 Clamp-on sensor mounting configuration and separation distance	
3.6 Flowmeter installation	
3.6.1 <i>Outline dimensions</i>	
3.6.2 <i>Electrical connections</i>	
3.7 Clamp-on sensor mounting	
3.7.1 <i>Sensor pipe mounting configurations</i>	
3.7.2 <i>Acoustic coupling gel</i>	
3.7.3 <i>Correct positioning of the sensors</i>	
3.7.4 <i>Sensor mounting with fixtures and chains</i>	
4 Operation	18
4.1 Switching On/Off	
4.2 Battery charging	
4.3 Keypad and display	
4.3.1 <i>Keypad key functions</i>	
4.3.2 <i>Display functions</i>	
4.4 Quick setup wizard	
4.5 Measurements	
4.5.1 <i>Main process value (PV) display</i>	
3-line display	
4.5.2 <i>Diagnostic displays</i>	
4.5.3 <i>Totalisers</i>	
4.5.4 <i>Datalogger</i>	
5 Commissioning.....	26
5.1 Menu structure	
5.2 Diagnostics	
5.3 Display settings	
5.3.1 <i>Main PV</i>	
5.4 Output configuration	

- 5.4.1 *Serial interface RS 232*
- 5.4.2 *Analogue current output 0/4 ... 20 mA*
- 5.4.3 *Digital Open-Collector output*
- 5.4.4 *Digital relay output*
- 5.5 Input configuration
 - 5.5.1 *PT100 inputs*
- 5.6 Heat quantity measurement (HQM)
- 5.7 Sound velocity measurement (SVM)
- 5.8 Dual-channel flow calculations (maths functions)

- 6 Maintenance.....35**
- 7 Troubleshooting35**
- 8 Technical data.....36**

1 Safety instructions, legal requirements, warranty, return policy

1.1 Symbols used in these operating instructions



Danger

This symbol represents an immediate hazardous situation which could result in a **serious injury, death** or **damage to the equipment**. Where this symbol is shown, do not use the equipment further unless you have fully understood the nature of the hazard and have taken the required precautions.



Attention

This symbol indicates important instructions which should be respected in order to avoid damaging or destroying the equipment. Follow the precautions given in these instructions to avoid the hazard. Call our service team if necessary.



Call service

Where this symbol is shown call our service team for advice if necessary.



Note

This symbol indicates a note or detailed set-up tip.



Information point.



Operator keys are printed in bold typeface and placed in pointed brackets.

1.2 Safety instructions

- ⌘ Do not install, operate or maintain this flowmeter without reading, understanding and following these operating instructions, otherwise injury or damage may result.
- ⌘ Study these operating instructions carefully before the installation of the equipment and keep them for future reference.
- ⌘ Observe all warnings, notes and instructions as marked on the packaging, on the equipment, and detailed in the operating instructions.
- ⌘ Do not use the instrument under wet conditions with the battery cover removed or opened.
- ⌘ Follow the unpacking, storage and preservation instructions to avoid damage to the equipment.

- ⌘ Install the equipment and cabling securely and safely according to the relevant regulations.
- ⌘ If the product does not operate normally, please refer to the service and troubleshooting instructions, or contact ECHO for help.

1.3 Warranty

- ⌘ Any product purchased from ECHO is warranted in accordance with the relevant product documentation and as specified in the sales contract provided it has been used for the purpose for which it has been designed and operated as outlined in these operating instructions. Misuse of the equipment will immediately revoke any warranty given or implied.
- ⌘ Responsibility for suitability and intended use of this ultrasonic flowmeter rests solely with the user. Improper installation and operation of the flowmeter may lead to a loss of warranty.
- ⌘ Please note that there are no operator-serviceable parts inside the equipment. Any unauthorised interference with the product will invalidate the warranty.

1.4 Return policy

If the flowmeter has been diagnosed to be faulty, it can be returned to ECHO for repair using the Customer Returns Note (CRN) attached to the Appendix of this manual. ECHO regrets that for Health & Safety reasons we cannot accept the return of the equipment unless accompanied by the completed CRN.

1.5 Legislative requirements

CE marking

The flowmeter is designed to meet the safety requirements in accordance with sound engineering practice. It has been tested and has left the factory in a condition in which it is safe to operate. The equipment is in conformity with the statutory requirements of the EC directive and complies with applicable regulations and standards for electrical safety EN 61010 and electromagnetic compatibility EN 61326. A CE Declaration of Conformity has been issued in that respect, a copy of which can be found in the Appendix of these operating instructions.

WEEE Directive

The Waste Electrical and Electronic Equipment Directive (WEEE Directive) aims to minimise the impact of electrical and electronic goods on the environment by increasing re-use and recycling and by reducing the amount of WEEE going to landfill. It seeks to achieve this by making producers responsible for financing the collection, treatment, and recovery of waste electrical equipment, and by obliging distributors to allow consumers to return their waste equipment free of charge.



ECHO offers its customers the possibility of returning unused and obsolete equipment for correct disposal and recycling. The Dustbin Symbol indi-

cates that when the last user wishes to discard this product, it must be sent to appropriate facilities for recovery and recycling. By not discarding this product along with other household-type waste, the volume of waste sent to incinerators or landfills will be reduced and natural resources will be conserved. Please use the Customer Return Note (CRN) in the Appendix for return to ECHO.

RoHS Directive

The European Union's RoHS ("Restriction of the use of certain Hazardous Substances") Directive (2002/95/EC) came into effect on July 1, 2006. All of the instrumentation manufactured by ECHO falls under Category 9, Measurement and Control Equipment. Currently this category is exempt from RoHS compliance until at least 2010, when it and other exemptions will be reviewed. Regardless of this, all products manufactured by ECHO are compliant with the RoHS Directive.

2 Introduction

Clamp-on transit-time flowmeter

The Arrow Hunter PLUS – BTU are a portable battery operated ultrasonic flowmeter employing clamp-on sensors for the measurement of liquids in full, enclosed pipes. Flow measurements can be undertaken without interruption of the process or interference with the integrity of the pipeline. The clamp-on sensors are attached to the outside of the pipes. The Arrow Hunter PLUS – BTU use ultrasonic signals for the measurement of the flow, employing the transit-time method.

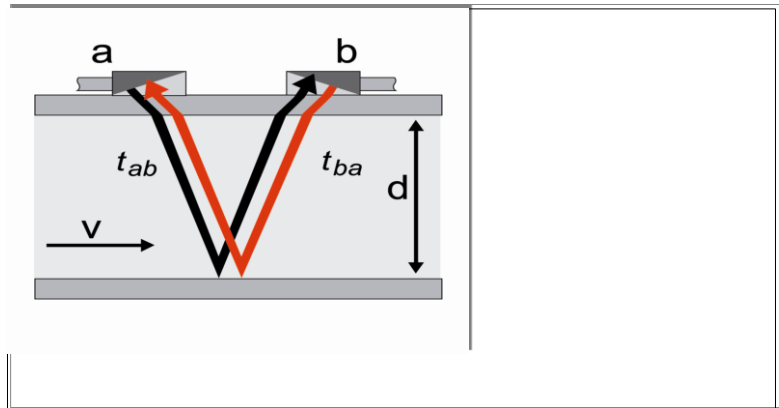


Illustration 1: Clamp-on ultrasonic flowmeter configuration

Measuring principle

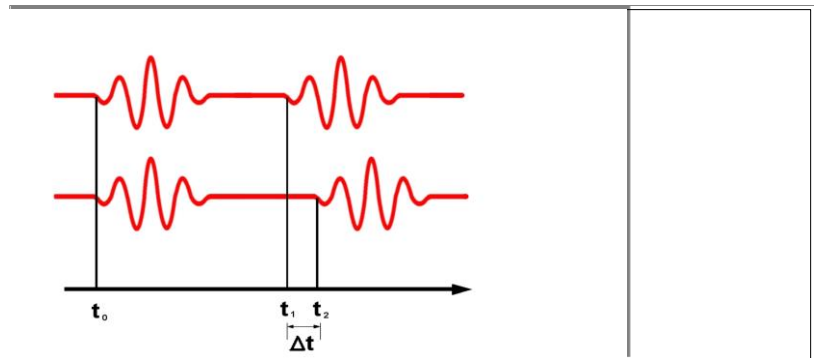


Illustration 2: Transit-time measuring principle

Ultrasonic signals are emitted by a transducer installed on a pipe and received by a second transducer. These signals are emitted alternately in the direction of flow and against it. Because the medium is flowing, the transit time of the sound signals propagating in the direction of flow is shorter than the transit time of the signal propagating against the direction of flow. The transit-time difference ΔT is measured and allows the determination of the average flow velocity along the path of acoustic propagation. A profile correction is then performed to obtain the average flow velocity over the cross-sectional area of the pipe, which is proportional to the volumetric flow rate.

3 Installation

3.1 Unpacking and storage

3.1.1 Unpacking

Care should be taken when opening the box containing the flowmeter, any markings or warnings shown on the packaging should be observed prior to opening. The following steps should then be taken:

- ⌘ Unpack the flowmeter in a dry area.
- ⌘ The flowmeter should be handled with care and not left in an area where it could be subject to physical shocks.
- ⌘ If using a knife to remove packaging care should be taken not to damage the flowmeter or cables.
- ⌘ The flowmeter package and contents should be checked against the delivery note supplied and any missing items reported immediately.
- ⌘ The flowmeter package and contents should be checked for signs of damage during transport and any problems reported immediately.
- ⌘ The vendor accepts no responsibility for damage or injury caused during the unpacking of the instrumentation supplied.
- ⌘ Excess packing materials should be either recycled or disposed of in a suitable way.

3.1.2 Storage

If storage is necessary, the flowmeter and sensors should be stored:

- ⌘ in a secure location,
- ⌘ away from water and harsh environmental conditions,
- ⌘ in such a way as to avoid damage,
- ⌘ small items should be kept together in the bags and small plastic boxes provided to avoid loss.

3.1.3 Identification of components

The following items are typically supplied (please refer to your delivery note for a detailed description):

- ⌘ Arrow Hunter PLUS – BTU portable flowmeter
- ⌘ Clamp-on sensors (usually one or two pairs depending on pipe sizes to be measured)
- ⌘ Sensor extension cable(s) (optional)
- ⌘ Sensor mounting accessories
- ⌘ Coupling component
- ⌘ Measuring tape
- ⌘ Operating instructions
- ⌘ Calibration certificate(s) (optional)
- ⌘ Temperature measurement probes (optional)
- ⌘ Process output terminal box (optional)

3.2 Clamp-on sensor installation

The correct selection of the sensor location is crucial for achieving reliable measurements and a high accuracy. Measurement must take place on a pipe in which sound can propagate (see Acoustic Propagation) and in which a rotationally symmetrical flow profile is fully developed (see Straight Pipe Lengths).

The correct positioning of the transducers is an essential condition for error-free measurements. It guarantees that the sound signal will be received under optimal conditions and evaluated correctly. Because of the variety of applications and the different factors influencing the measurement, there can be no standard solution for the positioning of the transducers.

The correct position of the transducers will be influenced by the following factors:

- ⌘ diameter, material, lining, wall thickness and general condition of the pipe,
- ⌘ medium flowing in the pipe
- ⌘ presence of gas bubbles and solid particles in the medium.

Check that the temperature at the selected location is within the operating temperature range of the transducers (see technical specification in the Appendix).

Acoustic propagation Acoustic propagation is given when the flowmeter is able to receive sufficient signal from the transmitted ultrasonic pulses. The signals are attenuated in the pipe material, the medium and at each of the interfaces and reflections. External and internal pipe corrosion, solid particles and gas content in the medium do heavily contribute to signal attenuation.

Straight pipe lengths Sufficient straight lengths of pipe on the inlet and outlet of the measuring location guarantee an axi-symmetrical flow profile in the pipe for good measurement accuracy. If no sufficient straight lengths of pipe are available for your application, measurements are still obtainable but the uncertainty of the measurement can be compromised.

3.3 Installation location



Select an installation location following the recommendations in Table 1 and try to avoid measuring:

- ⌘ in the vicinity of deformations and defects of the pipe,
- ⌘ near welding seams,
- ⌘ where deposits could be building up in the pipe.


For a horizontal pipe:

Select a location where the transducers can be mounted on the side of the pipe, so that the sound waves emitted by the transducers propagate horizontally in the pipe. In this way, the solid particles deposited on the bottom of the pipe and the gas pockets developing at the top will not influence the propagation of the signal.



For a free inlet or outlet pipe section:

Select the measuring point at a location where the pipe cannot run empty.

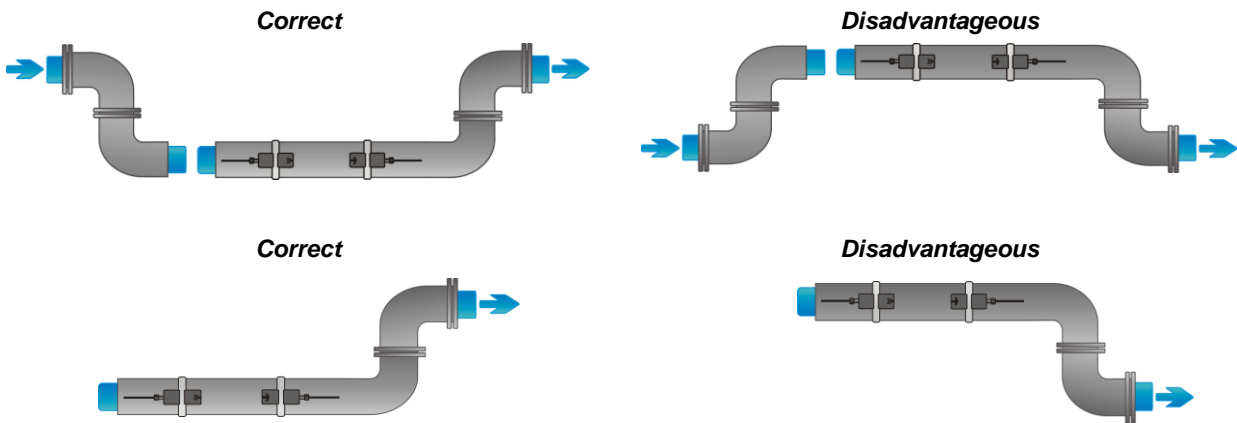

For a vertical pipe:

Select the measuring point at a location where the liquid flows upward to ensure that the pipe is completely filled.



Table 1: Recommendations for sensor mounting location

Look for a sensor installation location with sufficient straight pipe to obtain accurate measurements. Please refer to Table 2 as a guideline for recommended distances from disturbance sources.


Disturbance source: 90°-elbow

Inlet

Outlet

$L \geq 10 D$

$L \geq 5 D$

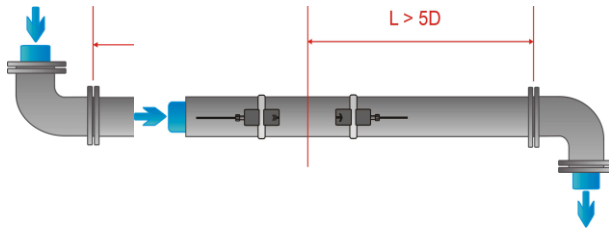


Disturbance source: 2 x 90°-elbows in one plane

Inlet

Outlet

$L \geq 25 D$

$L \geq 5 D$

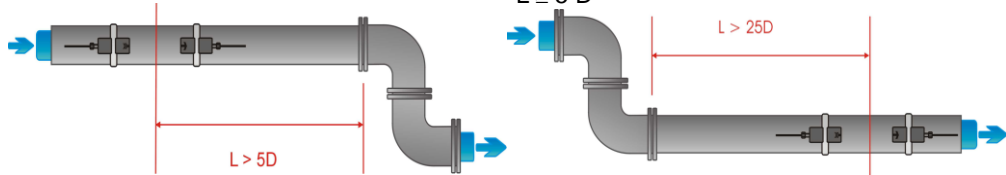


Disturbance source: 2 x 90°-elbows in different planes

Inlet

Outlet

$L \geq 40 D$

$L \geq 5 D$

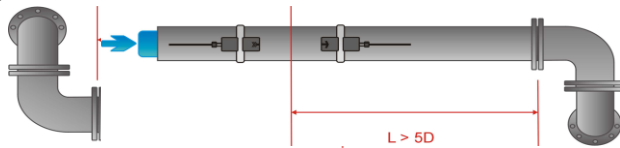

Disturbance source: T-section

Inlet

Outlet

$L \geq 50 D$

$L \geq 10 D$



Disturbance source: diffuser

Inlet

Outlet

$L \geq 30 D$


$L \geq 5 D$



Disturbance source: reducer

Inlet
 $L \geq 10 D$


Outlet
 $L \geq 5 D$

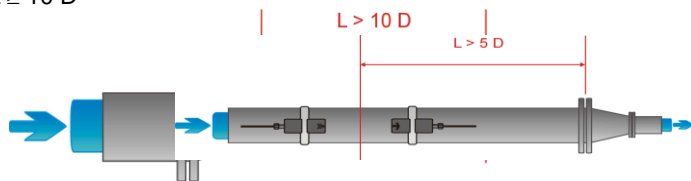

Disturbance source: valve

Inlet
 $L \geq 40 D$

Outlet
 $L \geq 10 D$

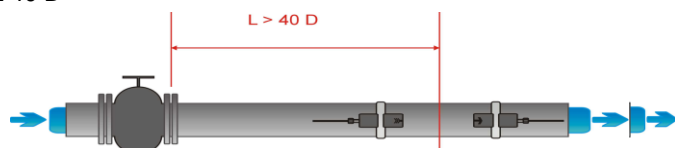

Disturbance source: pump

Inlet
 $L \geq 50 D$

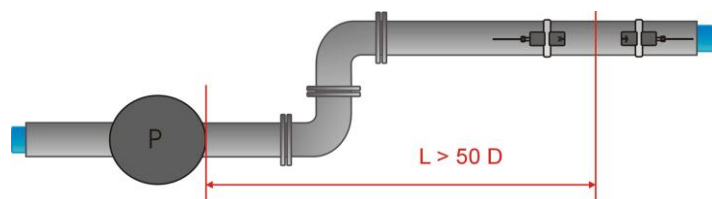


Table 2: Recommended distances from disturbance sources

3.4 Pipe preparation



- ⌘ Clean dirt and dust from around the area of the pipework where the sensors are to be placed.
- ⌘ Remove loose paint and rust with a wire brush or file.

Firmly bonded paint does not necessarily need to be removed provided the flowmeter diagnostics indicate sufficient signal strength.

3.5 Clamp-on sensor mounting configurations and separation distance

Reflection Mode

The most common clamp-on sensor mounting configuration is the Reflection Mode, sometimes known as V-Mode (see Illustration 3, sketch (1)). Here, the ultrasonic signal passes twice through the medium (2 signal passes). The Reflection Mode is the most convenient mounting method as the transducer separation distance can be measured easily and the sensors can be accurately aligned. This method should be used whenever possible.

Diagonal Mode

An alternative mounting configuration (Illustration 3, sketch (3)) is the Diagonal mode (Z-Mode). The signals travel only once through the pipe. This method is often used for larger pipes where greater signal attenuation might occur.

Further variation of the Reflection and the Diagonal Modes are possible by altering the number of passes through the pipe. Any even number of passes will require mounting the sensors on the same side of the pipe, while with an odd number of passes; the sensors must be mounted on opposite sides of the pipe. Commonly, for very small pipes, sensor mounting configurations such as 4 passes (W-mode) or 3 passes (N-mode) are used (Illustration 3, sketch (2)).

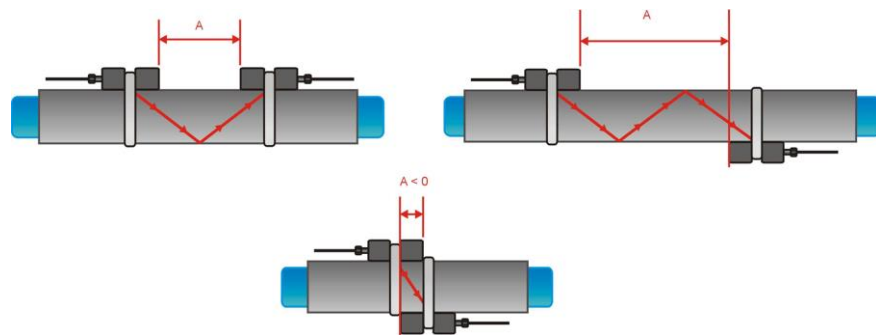


Illustration 3: Clamp-on sensor mounting configurations and sensor spacing

Transducer separation distance

The transducer separation distance A is measured from the inside edges of the sensor heads as shown in illustration 3. It is automatically calculated by the flowmeter based on the parameter entries for pipe outside diameter, wall thickness, lining material and thickness, medium, process temperature, the sensor type and the selected number of signal passes.

A negative separation distance $A < 0$ can occur for mounting configurations on small pipes where diagonal mode operation has been selected (see Illustration 3, sketch (3)). Negative separation distances may be suggested for reflection mode installations, but are not possible. In these cases, use diagonal mode or a larger number of passes.


3.6 Flowmeter installation

3.6.1 Outline dimensions

The Arrow Hunter PLUS – BTU is a portable, battery operated device with the following outline dimensions.


XTT+LG type transducer

XTT+SM type transducer

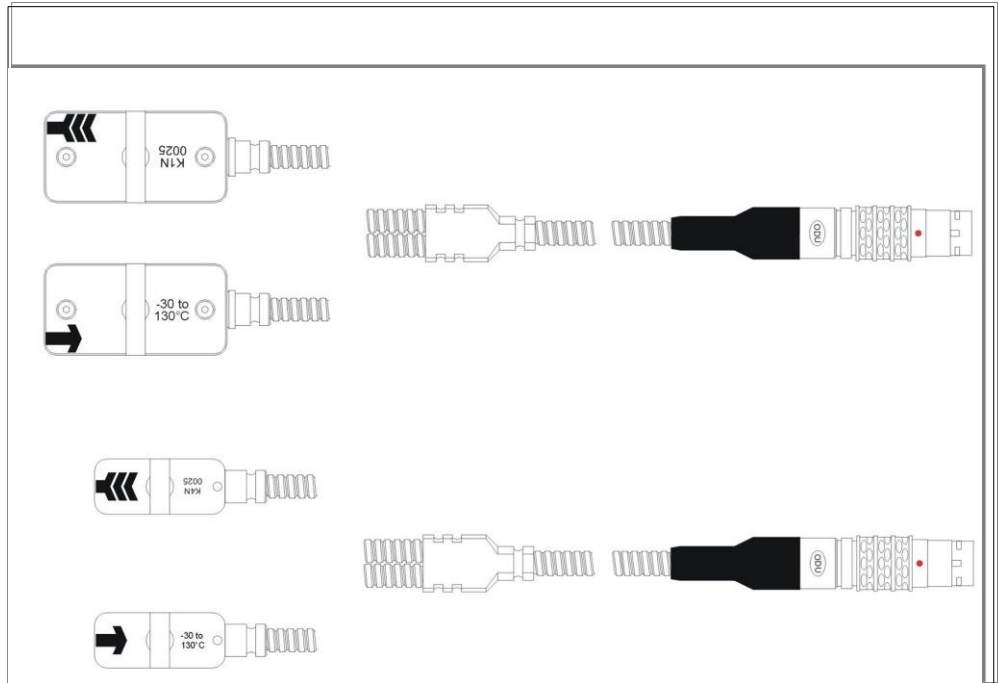


Drawing 1: Outline dimensions

Flowmeter outline dimensions

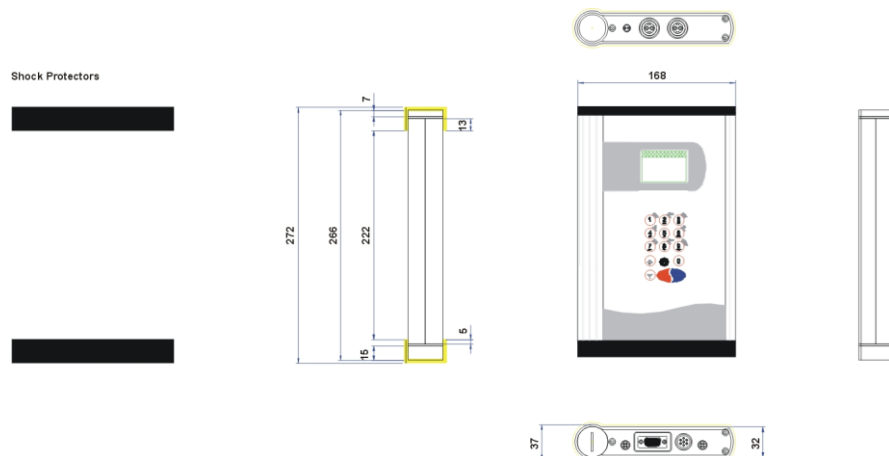

3.6.2 Electrical connections

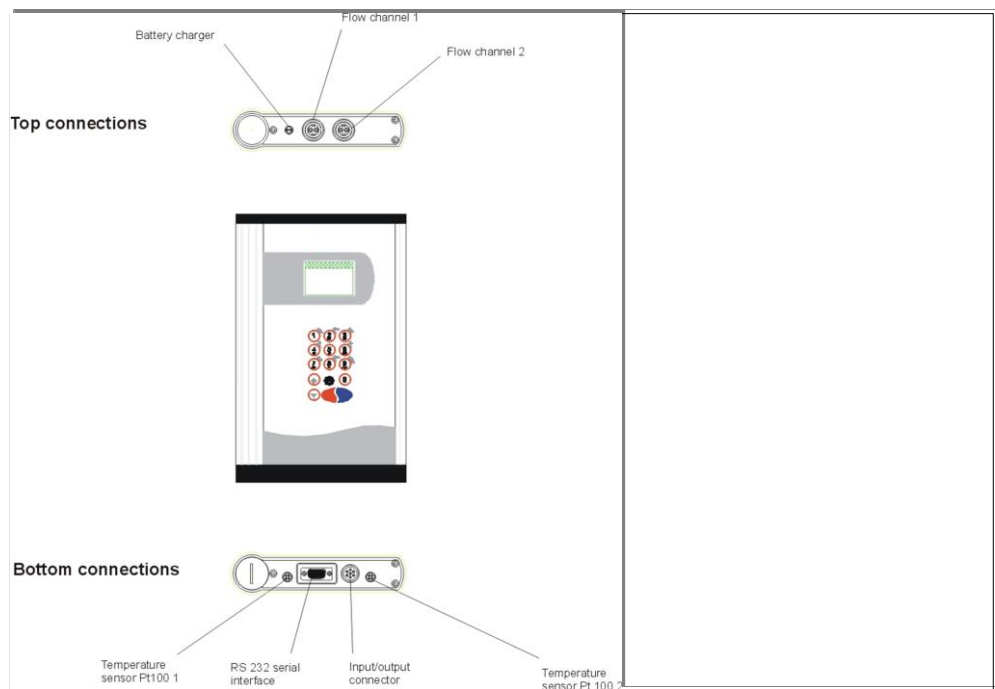

3.7 Clamp-on sensor mounting

Before the sensors can be mounted

- ⌘ the installation location should have been determined,
- ⌘ a sensor mounting method should be chosen,
- ⌘ the flowmeter batteries must be sufficiently charged,
- ⌘ the sensors must be connected to the transmitter.

Depending on which sensor mounting method is being used, the clamp on sensors are either mounted on the same side of the pipe (Reflection Mode) or on opposite sides of the pipe (Diagonal Mode – See Section 2.5).

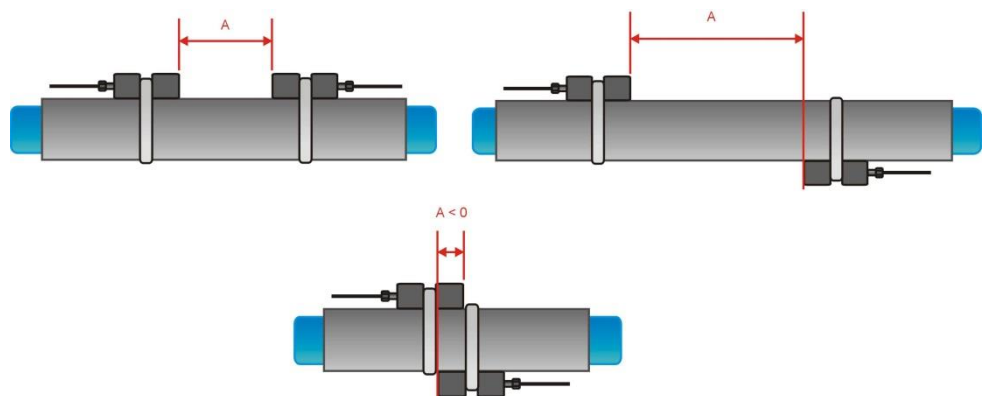


Illustration 6: Correct positioning of the sensors

3.7.1 Sensor pipe mounting configurations

3.7.2 Acoustic coupling gel



In order to obtain acoustical contact between the pipe and the sensors, apply a bead of acoustic coupling gel lengthwise down the centre of the contact area of the sensors.



Illustration 5: Application of acoustic coupling gel

3.7.3 Correct positioning of the sensors

Always mount the transducer pair so that the free front edges of the sensors face each other.



There is a different engraving on the top of each transducer. The transducers are mounted correctly if the engravings on the two transducers form an arrow. The transducer cables should point in opposite directions.

Later, the arrow, in conjunction with the indicated measured value, will help to determine the direction of flow.

The sensor separation distance is automatically calculated by the flowmeter based on the parameter entries for pipe outside diameter, wall thickness, lining material and thickness, medium, process temperature, **the sensor type and the selected number of signal passes**. The **sensor positioning** screen (above, and Section 3.3) allows fine adjustment of the sensor location.

3.7.4 Sensor mounting with fixtures and chains



Illustration 7: Sensor mounting with clips and chains (ordered optionally)

Illustration 8: Sensor mounting with fixtures and chains (retaining clip)


- ⌘ Insert the retaining clip into the groove on the top of the transducer and secure it using the screw knob.
- ⌘ Apply some acoustic coupling component to the contact surface of the transducer.
- ⌘ Place the transducer on the side of the pipe or alternatively up to 45 degrees from the horizontal plane through the pipe.



This is advisable to establish the best acoustic contact since on top of the pipe air pockets could develop and deposits could accumulate at the bottom of the pipe.

- ⌘ Take the spring end of the chain in one hand and insert the last ball element in the vertical slot of the retaining clip. Mount the chain around the pipe.
- ⌘ Pull the chain firmly around the pipe and fasten it in the lateral slot of the retaining clip. There should be no air pockets between the transducer surface and the pipe wall.
- ⌘ Mount the second transducer the same way.
- ⌘ Using a measuring tape, adjust the sensor separation distance as suggested by the flowmeter. When the sensor positioning screen (Section 3.3) is displayed, the middle bar allows fine adjustment of the sensor location.

4 Operation

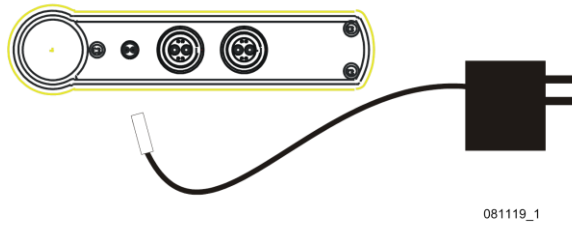

081119_1

Illustration 9: Battery charging

4.1 Switching On/Off

The flowmeter is switched on by holding the **<ON>** key for more than 2 seconds continuously. Equally it can be switched off by pressing the **<OFF>** key for more than 2 seconds.

4.2 Battery charging

The internal batteries can be recharged with the external battery charger supplied.



Important: Ensure that only Nickel Metal Hydride (NiMH) AA size rechargeable batteries are installed – attempting to recharge other battery types is dangerous and may cause damage.


Connect the battery charger to the charging socket of the flowmeter and to the mains supply 100 ... 240 VAC, 50/60 Hz. The battery charger mains plug is supplied for specific countries as shown in the order code.



During the charging process, the battery icon will blink. For a fully charged battery all segments of the battery icon will be filled.

4.3 Keypad and display

Keypad

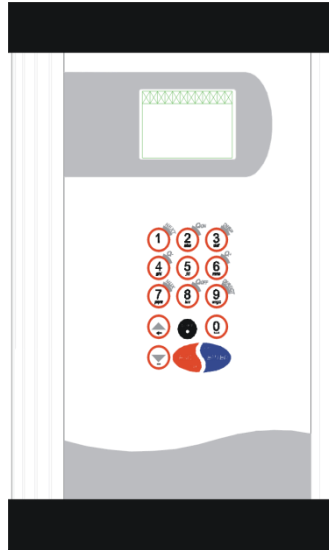

4.3.1 Keypad key functions
















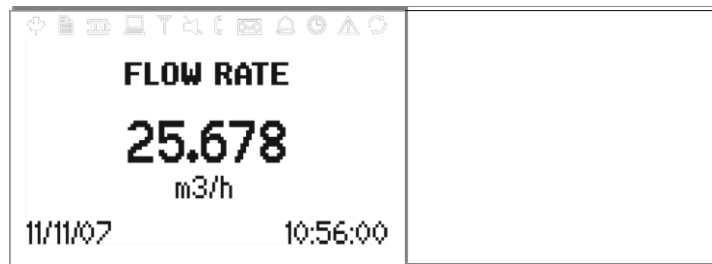
Key	Main function	Secondary function
	Character entry: 1 (1 short key stroke) , (2 short key strokes) . (3 short key strokes) _ (4 short key strokes)	Show NEXT available item
	Character entry: A B C 2 /	Q_{ON} = Start totalizer function
	Character entry: D E F 3 ?	Show next Display
	Character entry: G H I 4 <	Q. = Show negative total value
	Character entry: J K L 5 >	

Table 3: Menu structure

	Character entry: M N O 6 \$	Q+ = Show positive total value
	Character entry: P Q R S 7	Toggle Multiplexer (where multi-channel functions are provided)
	Character entry: T U V 8 *	QOFF = Stop totalizer function
	Character entry: W X Y Z 9	DIRECT access to trend plot
	Move menu/list selection item UP	Character backspace clear
	Character entry: . (decimal point)	Switch LCD backlight on/off
	Character entry: 0 Space character + = #	
	Move menu/list selection item DOWN	Character entry : - (minus sign)
	Escape menu item	Abort entry without saving
	ENTER menu item	Confirm entry with saving

4.3.2 Display functions


















Display icon	Function
	On Icon not used Off Icon not used
	On Datalogger recording Off Datalogger switched off
	On 1 segment = 33% battery power available 2 segments = 66% battery power available 3 segments = 100% battery power available Off < 5% battery power available Outline blinking Battery charging
	On LCD backlight switched on Off LCD backlight switched off
	On I/O processor error Off I/O processor functioning correctly
	On Without strike-through: Speaker on Off With strike-through: Speaker off
	On Poor sensor coupling, low SNR Off Sensor coupling OK
	On Icon not used Off Icon not used
	On Icon not used Off Icon not used
	On RTC operating Off RTC failure
	On Error recorded in error log Off No error detected
	On Serial output RS 232 switched on Off Serial output RS 232 switched off

Illustration 11: Main display functions


4.4 Quick setup wizard

The quick setup wizard allows for a speedy setup of the most important parameters in order to achieve successful measurements in the shortest possible time:

Quick start wizard

Display screen	Operation								
<p style="text-align: center;">MAIN MENU</p> <table border="0"> <tr> <td>Quick start</td> <td>System</td> </tr> <tr> <td>Installation</td> <td>Diagnostics</td> </tr> <tr> <td>Output</td> <td>Datalogger</td> </tr> <tr> <td>Input</td> <td>Serial Comm</td> </tr> </table>	Quick start	System	Installation	Diagnostics	Output	Datalogger	Input	Serial Comm	<p>Upon first power on and the boot-up sequence, the main menu is displayed.</p>  <p>Use <UP> and <DOWN> cursor keys to select Quick start. Confirm by pressing <ENTER>.</p> 
Quick start	System								
Installation	Diagnostics								
Output	Datalogger								
Input	Serial Comm								
<p style="text-align: center;">QUICK START MENU</p> <table border="0"> <tr> <td>Setup Wizard Single</td> </tr> <tr> <td>Setup Wizard Dual</td> </tr> <tr> <td>Start Measurement</td> </tr> </table>	Setup Wizard Single	Setup Wizard Dual	Start Measurement	<p>Use cursor keys to select Setup Wizard. Confirm by pressing <ENTER>.</p> <p>If sensors are recognised, the serial number will be shown. If not recognised or not connected, they may be selected from a list.</p>					
Setup Wizard Single									
Setup Wizard Dual									
Start Measurement									
<p style="text-align: center;">Units</p> <table border="1" style="width: 100%;"> <tr> <td style="text-align: center;">m³/h</td> <td style="text-align: right;">↑</td> </tr> <tr> <td style="text-align: center;">m³/m</td> <td style="text-align: right;">⊞</td> </tr> <tr> <td style="text-align: center;">m³/s</td> <td style="text-align: right;">↓</td> </tr> </table>	m ³ /h	↑	m ³ /m	⊞	m ³ /s	↓	<p>Select units of measurement using cursor keys and pressing <ENTER>.</p>		
m ³ /h	↑								
m ³ /m	⊞								
m ³ /s	↓								
<p style="text-align: center;">PIPE MATERIAL</p> <table border="1" style="width: 100%;"> <tr> <td style="text-align: center;">Stainless Steel</td> <td style="text-align: right;">↑</td> </tr> <tr> <td style="text-align: center;">Carbon Steel</td> <td style="text-align: right;">⊞</td> </tr> <tr> <td style="text-align: center;">Ductile cast iron</td> <td style="text-align: right;">↓</td> </tr> </table>	Stainless Steel	↑	Carbon Steel	⊞	Ductile cast iron	↓	<p>Choose pipe material using cursor keys and pressing <ENTER>.</p>		
Stainless Steel	↑								
Carbon Steel	⊞								
Ductile cast iron	↓								
<p style="text-align: center;">OUTSIDE DIAMETER</p> <p style="text-align: center;">76.1</p> <p style="text-align: center;">mm</p>	 <p>Enter outside pipe diameter using alphanumeric keys and confirm by pressing <ENTER>.</p> <p>Use key <UP> as character backspace clear to correct for data entry errors.</p> <p>If 0 is entered, an additional screen appears that allows entering the pipe circumference.</p>								


<p style="text-align: center;">WALL THICKNESS</p> <p style="text-align: center;">3.4 mm</p>	<p>Enter pipe wall thickness using alphanumerical keys and confirm by pressing <ENTER>.</p> <p>Use key <UP> as character backspace clear to correct for data entry errors.</p>
<p style="text-align: center;">FLUID</p> <div style="border: 1px solid black; padding: 5px;"> <p style="background-color: black; color: white; padding: 2px;">Water</p> <p>Saltwater</p> <p>Acetone</p> </div>	<p>Select fluid using cursor keys.</p> <p>Confirm by pressing <ENTER>.</p>
<p style="text-align: center;">TEMPERATURE</p> <p style="text-align: center;">20.0 C</p>	<p>Enter process temperature using alphanumerical keys and confirm by pressing <ENTER>.</p> <p>Use key <UP> as character backspace clear to correct for data entry errors.</p>
<p style="text-align: center;">LINER MATERIAL</p> <div style="border: 1px solid black; padding: 5px;"> <p style="background-color: black; color: white; padding: 2px;">None</p> <p>Epoxy</p> <p>Rubber</p> </div>	<p>Select pipe lining material using cursor keys.</p> <p>Confirm by pressing <ENTER>.</p>
<p style="text-align: center;">PASSES</p> <div style="border: 1px solid black; padding: 5px;"> <p style="background-color: black; color: white; padding: 2px;">Auto</p> <p>1</p> <p>2</p> </div>	<p>Select transducer configuration (number of passes) using cursor keys.</p> <p>Auto Automatically 1 1 pass, diagonal mode 2 2 passes, reflection mode 3 3 passes, diagonal mode 4 4 passes, reflection mode 5 5 passes, diagonal mode 6 6 passes, reflection mode ..etc.</p> <p>Confirm by pressing <ENTER>.</p>
<p style="text-align: center;">QUICK START MENU</p> <div style="border: 1px solid black; padding: 5px;"> <p style="background-color: black; color: white; padding: 2px;">Setup Wizard Single</p> <p>Setup Wizard Dual</p> <p>Start Measurement</p> </div>	<p>Use cursor keys to select Start Measurement. Confirm by pressing <ENTER>.</p>

<p style="text-align: center;">CHNL1 SENSOR</p> <p>Spacing 110.5 mm</p> <p>Using 2 passes</p> <p>Signal 26 dB</p> 	<p>Sensor placement screen: Mount transducers with suggested spacing and use middle bar for fine adjustment of position (central position is desired). Observe signal-to-noise (upper bar) and quality (lower bar). These should be of identical length.</p> <p>Confirm by pressing <ENTER> to obtain measurements.</p>
<p style="text-align: center;">FLOW RATE</p> <p style="text-align: center;">25.678</p> <p style="text-align: center;">m3/h</p> <p>11/11/07 10:56:00</p> <p><i>Table 4: Quick setup wizard</i></p>	<p>Success!</p>




4.5 Measurements

4.5.1 Main process value (PV) display

Measurement is started using the Quick Setup Wizard. Once all the parameters are programmed, any subsequent power-on sequences will bring up the main PV display immediately.

Display screen	Operation
<p style="text-align: center;">FLOW RATE</p> <p style="text-align: center;">25.678</p> <p style="text-align: center;">m3/h</p> <p>11/11/07 10:56:00</p>	<p>The main process value can be changed by accessing the menu structure.</p> <p>Press <ESC> at any time to access the main menu.</p>  <p>Change to the 3-line display by pressing <DISP>.</p>

4.5.2 3-line display format

Display screen	Operation
<p style="text-align: center;">FLOW</p> <p style="text-align: center;">Pump P3A</p> <p style="text-align: center;">25.678 m³/h</p> <p style="text-align: center;">1.370 m/s</p> <p>11/11/07 10:56:00</p>	<p> 3 def</p> <p>The three-line display screen is configurable to show flow, totalizers and diagnostic functions.</p> <p> 1</p> <p>Change to diagnostic displays by pressing <DISP> and to totalizer screens by pressing <NEXT>.</p> <p> 7 pqrs</p> <p>Cycle through screens using <NEXT>. Cycle through available flow channels using <MUX>.</p>

4.5.3 Diagnostic displays

Diagnostic screens






Display screen	Operation
<p style="text-align: center;">DIAGNOSTIC 1</p> <p style="text-align: center;">55.2 Gain</p> <p style="text-align: center;">20.5 Signal</p> <p style="text-align: center;">-10.0 Noise</p> <p>11/11/07 10:56:00</p>	<p>Line 1 shows the amplifier gain.</p> <p>Line 2 displays the signal strength.</p> <p>Line 3 indicates the noise.</p> <p>Change to more diagnostic displays by pressing <NEXT>.</p>

4.5.4 Totalizers

The totalizer displays will only be shown when the totalizers are activated.

Totalizers

Display screen	Operation
<p> 2 abc</p> <p style="text-align: center;">TOTALISER -1</p> <p style="text-align: center;">- 0.0 m³</p> <p style="text-align: center;">0.0 +</p> <p style="text-align: center;">- 0.0 -</p> <p>11/11/07 10:56:00</p>	<p>The flow totalizer can be started or reset by pressing <Q_{ON}>.</p> <p> 6 mno</p> <p> 8 tuv</p> <p>Pressing <Q₊> shows the total accumulated flow in positive flow direction. Pressing <Q₋> shows the total accumulated flow in negative flow direction.</p>

The totalizers can be stopped by activating **<Q_{OFF}>**. Pressing **<Q_{ON}>** again will reset to zero.



Change to other displays or revert to the totalizer screen without resetting by pressing **<DISP>** or **<NEXT>**.

4.5.5 Datalogger



The datalogger is enabled from the Main Menu, and operates when a non-zero value is entered for the interval. Setting an interval value of zero stops the datalogger, though measured values are retained.

Changing from an interval of zero to any non-zero interval will clear the logger. Ensure all required measurements are downloaded before doing this.

Changing between two non-zero intervals will not clear the logger area.

5 Commissioning

5.1 Menu structure

Menu structure

Main menu	Menu level 1	Menu level 2	Description/settings
Quick Start			
	Setup Wizard Single		
		Sensor type	Indication of sensor type and serial number if automatically detected, otherwise select from list ↑↓ K1 (XTT+LG) K4 (XTT+SM) M Q Special
		Units	Select from list ↑↓ m/s, f/s, in/s, m ³ /h, m ³ /min, m ³ /s, l/h, l/min, l/s, USgall/h, USgall/min, USgall/s, bbl/d, bbl/h, bbl/min, g/s, t/h, kg/h, kg/min, W, kW, MW (enter medium heat capacity, source and offset for each channel)
		Pipe material	Select from list ↑↓ Stainless steel, Carbon steel Ductile cast iron, Grey cast iron Copper, Lead PVC, PP, PE, ABS Glass, Cement User (pipe c-speed)
		Pipe c-speed	Only if user pipe material selected 600 ... 6553.5 m/s
		Outside diameter	6 ... 6500 mm
		Wall thickness	0.5 ... 75 mm
		Fluid	Select from list ↑↓ Water, Salt water

			<p>Acetone, Alcohol, Ammonia Carbon Tet (carbon tetrachloride) Ethanol, Ethyl alcohol, Ethyl ether</p> <p>Ethylene glycol, Glycol/water 50% Kerosene, Methanol, Methyl alcohol Milk, Naphtha, Car oil Freon R134a, Freon R22 Hydrochloric acid, Sour cream, Sulphuric acid Toluene, Vinyl chloride User (enter kinematic viscosity, density, medium c-speed)</p>
		Kinematic viscosity	<i>Only if user fluid selected</i> 0.001 ... 30000 mm ² /s
		Density	<i>Only if user fluid selected</i> 100 ... 2000 kg/m ³
		Medium c-speed	<i>Only if user fluid selected</i> 800 ... 3500 m/s
		Temperature	-30 ... 300 °C
		Liner Material	<i>Select from list</i> ↑↓ None, Epoxy, Rubber, PVDF, PP, Glass, Cement, User (liner c-speed)
		Liner c-speed	<i>Only if lining material selected</i> 600 ... 6553.0 m/s
		Liner thickness	<i>Only if lining material selected</i> 1.0 ... 99.0 mm
		Passes	<i>Select from list</i> ↑↓ Auto 1...16
	Setup Wizard Dual		
			<i>As setup wizard single for channel 1</i>
	Start Measurement		
		Sensor type	<i>Indication of sensor type and serial number if automatically detected, otherwise select from list</i> ↑↓ K1 (XTT+LG) K4 (XTT+SM) M Q Special
		Sensor frequency	<i>SP1, only for special, unrecognised sensors</i>
		Wedge angle	<i>SP2, only for special, unrecognised sensors</i>
		Wedge c-speed 1	<i>SP3, only for special, unrecognised sensors</i>
		Wedge c-speed 2	<i>SP4, only for special, unrecognised sensors</i>
		Crystal offset	<i>SP5, only for special, unrecognised sensors</i>
		Spacing offset	<i>SP6, only for special, unrecognised sensors</i>
		Zero flow offset	<i>SP7, only for special, unrecognised sensors</i>
		Upstream offset	<i>SP8, only for special, unrecognised sensors</i>
		Sensor placement	
Installation			
		Select channel	Channel 1, Channel 2
	Pipe		
		Material	<i>Select from pipe material list</i> ↑↓

		Outside diameter	6 ... 6500 mm
		Wall thickness	0.5 ... 75 mm
		Pipe c-speed	600 ... 6553.5 m/s
		Pipe circumference	18.8 ... 20420.4 mm
		Roughness	0.0 ... 10 mm
	Medium		
		Fluid	Select from fluid list ↑↓
		Kinematic (viscosity)	0.001 ... 30000 mm ² /s
		Density	100 ... 2000 kg/m ³
		C-speed	800 ... 3500 m/s
		Temperature	-30 ... 300 °C
	Lining		
		Material	Select from material list ↑↓
		Thickness	1 ... 99 mm
		C-speed	600 ... 6553.0 m/s
	Passes		
		Passes	Select from list ↑↓
Output			
	Display		
		Select channel	Channel 1, Channel 2
		Units	Select from unit list ↑↓
		Damping	Reduces fluctuations in the display output 1 ... 255 s
	Current		
		Mode	Yes – Current output on No – Current output off Flow 1 or 2 Math SOS (Speed of sound)
		Min Value	Min. process variable (PV) value that corresponds to 0/4 mA
		Max Value	Max. process variable (PV) value that corresponds to 20 mA
		Damping	Additional smoothing of the current output, the higher the damping factor, 1 ... 255 s
		Span	0-20mA or 4-20mA
		Error	Defines output behaviour in the event of error Select from list ↑↓ Hold (hold last value), 3.8mA, 21.0mA
	Open Collector		
		Mode	Yes – Pulse output on No – Pulse output off
		Pulse Value	Totalizer value of selected PV at which a pulse is generated, e.g. PV = [m ³ /h], Pulse Value = 10, a pulse is output every 10 m ³ 0.01 ... 1000
		Pulse Width	Width of the pulse 30 ... 999 ms
		Calc. Max	This is the calculated max. Number of pulses per second., i.e. the max. pulse rate in Hz

Relay			
		Mode	Off – Permanently off On – Permanently energised Alarm – PV alarm switch Math – Calculated value alarm switch Fault – Allocated to system failures, see error report list
		On Point	Value of PV at which the relay energises when in alarm mode
		Off Point	Value of PV at which the relay de-energises when in alarm mode
Input			
Temperature			
		Select channel	Channel 1, Channel 2
		Source	Fixed – A fixed temperature can be entered under value PT100 – Value read from PT100 temperature sensor in °C
		Value	Enter fixed user defined value 0 ... 250 °C
		Offset	Enter fixed user defined value -100 ... 100 °C
System			
Instrument info			
		Model Code	230
		Serial No.	Example: 23000013
		HW Revision	Example: 1.1, 1.2
		SW Revision	Example: 2.3, 1.4
Calculation			
		Select channel	Channel 1, Channel 2
		Low F Cut	± Low flow velocity cut off 0 ... 0.025 m/s
		Max F Cut	± Maximum flow velocity cut off 0 ... 30 m/s
		Corrected	Apply flow velocity profile correction Yes No
		PV Offset	Calibration process variable zero offset -30 ... 30 units
		PV Scaling	Calibration process variable gradient scaling 0 ... 10000 units
		Zero Cal	Zero calibration settings
		Zero	Perform auto zero calibration Yes No
		Track	Track zero offset Yes No
		Delta	Zero flow delta time offset in ns, read from sensor PROM or entered directly for special sensors
		Timeup	Upstream transit-time offset in µs, allows for fixed delays in special sensors, buffer rods and extension leads
		Math	Select from list ↑↓ None, Sum, Difference, Average (mean)
		Heat Capacity	Specific heat capacity of medium

	User		
		Identifier	<i>Example: Pump P3A 9 character string</i>
		Tag No.	<i>Example: 1FT-3011 9 character string</i>
	Test		
		Test Mode	<i>Control system simulation: 60 second ramping up of flow velocity in m/s from 0 to programmed Max F Cut and subsequent 60 second ramping down, i.e. the process variable would change over complete possible range. All configured outputs will exhibit their programmed behaviour.</i> Yes No
	Settings		
		Date	<i>Example: 03/10/07</i>
		Time	<i>Example: 09:27:00</i>
		Date Format	<i>Select from list ↑↓ dd/mm/yy mm/dd/yy yy/mm/dd</i>
		Language	<i>Select from list ↑↓ English German French Spanish Russian</i>
		Keypad	<i>Enable keypad sound</i> Yes No
		Battery	<i>Low warning (yes / no) Auto off timer (0...59 min)</i>
	Defaults		<i>Reload factory default settings, except for date and time</i> Yes No
Diagnostics			
		Temperature	<i>Shows control unit temperature</i>
		Log Memory	<i>Percentage of unused datalogger memory remaining</i>
		Battery	<i>Battery charge level (percentage)</i>
		Volts	<i>Battery voltage</i>
Datalogger			
		Interval	<i>A value of zero turns the datalogger off, a non-zero value turns the datalogger on and defines the logging interval. Going from a value of zero to a non-zero value clears the log memory.</i> 0 ... 999 s
		Overwrite	<i>When the log memory is full, i.e. 0 % remaining, the logger wraps around and starts to overwrite memory.</i> Yes No
		Low Memory	<i>Warning output: The amount of memory remaining at which the flowmeter begins to give an audible warning.</i> 0 ... 100 %
		Log Download	<i>Sends logger content to selected serial communication port.</i>
Serial Comm			
		Mode	<i>Select from list ↑↓ None</i>

			Printer, Diagnostic, Log download, Cal Test
		Baud	Select from list ↑↓ 2400 9600 (Default) 19200
		Parity	Select from list ↑↓ None Even (Default) Odd

Table 5: Firmware menu structure

5.2

5.3 Diagnostics

Diagnostic screens can be viewed directly during measurement or through the menu structure.

5.4 Display settings

Customer specific settings for data to be displayed can be achieved by accessing the appropriate menu items.


5.4.1 Main PV

The main Process Value (PV) is the primary measurement data.

5.5 Output configuration

There are 2 output connectors at the bottom of the AH+BTU enclosure. One is for serial communication through a standard 9-pin D-type RS 232 connector, process outputs (analogue and digital outputs) are available using a system I/O connector which must be connected via an I/O interface cable to a breakout terminal junction box.

Illustration 12: Process output breakout box

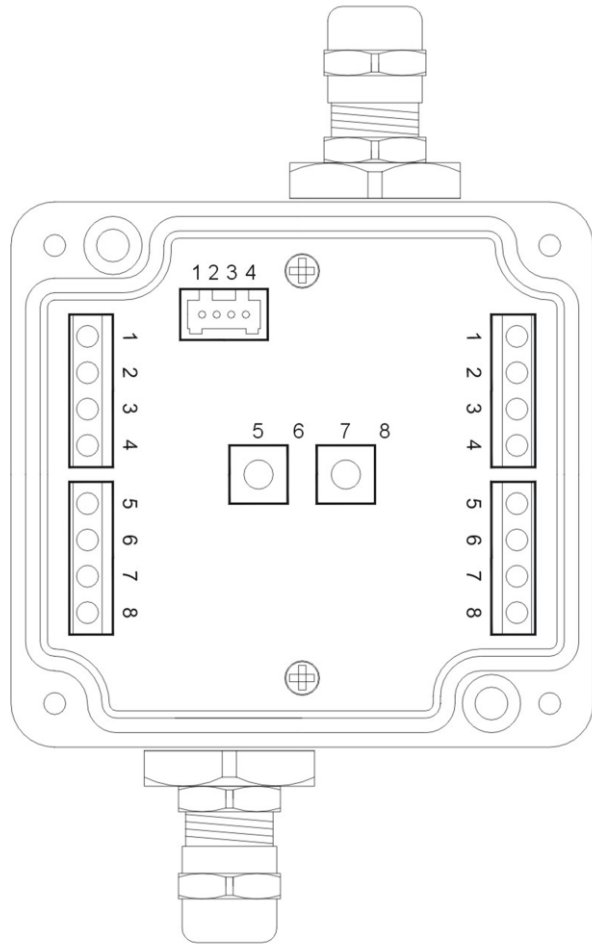

Serial interface RS232 **5.5.1 Serial interface RS 232**

The RS 232 serial interface can be used to transmit data on-line or to download the integral datalogger content. The settings can be found in submenu **Serial Comm**.

Analogue outputs



5.5.2 Analogue current output 0/4 ... 20 mA

The analogue current output operates in 4 ... 20 mA mode by default. 0 ... 20 mA operation is possible, please contact customer support.

The current output can be programmed, scaled and assigned to flow channel 1 or 2 within the menu structure.

Wiring	
Electrical characteristics	Range = 0/4 ... 20 mA Resolution = 16 bit U = 30 V $R_{Load} < 500 \Omega$ Accuracy = 0.1 % Galvanically isolated from main device and other I/O

Digital outputs



5.5.3 Digital Open-Collector output

The totalizer function is enabled and controlled using the <QON>, <Q+>, <Q-> and <QOFF> keys and from the menu structure where the pulse value and width are selected.

The digital Open-Collector output can be assigned to flow channel 1 or 2.

Wiring	
Electrical characteristics	U = 24 V $I_{max} = 4 \text{ mA}$ Value = 0.01 ... 1000 Pulse width = 30 ... 999 ms

5.5.4 Digital relay output

The relay outputs are enabled, controlled and assigned to flow channel 1 or 2 using the menu structure.

Wiring	
Electrical characteristics	Form C (SPDT-CO) contacts V = 48 V $I_{max} = 250 \text{ mA}$

5.6 Input configuration

There are two 4-wire circuit PT100 inputs available at the bottom of the enclosure.

5.6.1 PT100 inputs

Inputs

Wiring	4 wire configuration Plug connection
Electrical characteristics	PT100 4-wire circuit Measuring range = -50 ... 400 °C Resolution = 0.1 K Accuracy = ± 0.2 K

5.7 Heat quantity measurement (HQM)

Where equipped, heat quantity (energy) and heat flow (energy flow) can be measured on Channel 1 of the flowmeter.

If a heat quantity unit is specified for the Process Value, the AH+BTU will prompt the user for the Specific Heat Capacity of the medium in J/g/K (for example 4.186 J/g/K for water).

The Setup Wizard will then allow the user to select the temperature input source; either PT100 temperature sensors or a fixed value for measurement against a known inlet or outlet temperature. Where PT100 sensors are selected, the Wizard will prompt the user for a temperature offset, which may be useful where the temperature of the medium differs from the temperature of the pipe wall (for example with unlagged pipes). If a fixed value is selected, the Wizard will ask the user to specify this value. The Wizard will then precede with the installation parameters as in section 3.3.

When heat quantity units are selected, these behave as any other Process Value and may be totalized, logged, or applied to a Process Output.

5.8 Sound velocity measurement (SVM)

The measured sound velocity (SOS) is available as a diagnostic function during measurement and may be applied to a Process Output by selecting SOS from the appropriate output menu.

5.9 Dual-channel flow calculations (maths functions)

Where suitably equipped, dual channel calculations are available from the System/Calculation/Math menu.

These allow the user to select the sum, difference, average (mean) or maximum of the two flow channels.

This value may be displayed or applied to a Process Output by selecting MATH from the appropriate output menu.

6 Maintenance

No general maintenance is required for this equipment.

7 Troubleshooting

Should there be the need to call customer service, please let us know the following details:



- ☞ Model code
- ☞ Serial number
- ☞ SW, HW revision
- ☞ Error log list

Possible error messages may include the following:

Error list

Error message	Group	Description	Error handling
USB INIT FAIL	Hardware	Internal board communication error	Power on/off, otherwise call customer support
NO SERIAL NO.	Hardware	Failed to read from FRAM	Call customer support
NO VERSION NO.	Hardware	Failed to read from FRAM	Call customer support
PARA READ FAIL	Hardware	Failed to read from FRAM	Load defaults, otherwise call customer support
PARA WRITE FAIL	Hardware	Failed to write to FRAM	Load defaults, otherwise call customer support
VAR READ FAIL	Hardware	Failed to read from FRAM	Call customer support
VAR WRITE FAIL	Hardware	Failed to write to FRAM	Call customer support
SYSTEM ERROR	Hardware		Call customer support
VISIBILITY ERR	Hardware	Failed to read from FRAM	Call customer support
FRAM LONG WRITE ERR	Hardware	Failed to write to FRAM	Call customer support
FRAM READ ERR	Hardware	Failed to read from FRAM	Call customer support
RTC ERR	Hardware	Real Time Clock failure	Power on/off, otherwise call customer support
EXTMEM ERR	Hardware	Logger memory failure	Power on/off, otherwise call customer support
SPI ERR	Hardware	SPI bus failure	Power on/off, otherwise call customer support
I2C ERR	Hardware	I2C bus failure	Power on/off, otherwise call customer support
MATH ERR	Software	Internal calculation error	Call customer support
STACK ERR	Software	Internal calculation error	Call customer support
ADDR ERR	Software	Internal calculation error	Call customer support
OSC ERR	Software	Internal calculation error	Call customer support
ADC ERR	Software	Internal calculation error	Call customer support
IO ERR	Software	Internal calculation error	Call customer support
TIMING ERR	Software	Internal calculation error	Call customer support
COMM INIT ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM START ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support

Table 6: Error messages

COMM HS0 ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM HS1 ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM READ AVE ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM READ RAW ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM READ HISTORY ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
COMM CRC ERR	Hardware	Internal communication error	Power on/off, otherwise call customer support
SENSOR COUPLING ERR	Application	Weak sensor coupling, low SNR	Recouple sensors, check installation, reduce number of passes, look for other location, then have a cup of tea and call customer support!

8 Technical data

Material	Sound Speed* Shear Wave (at 25 °C)	
	m/s	ft/s
Steel, 1% Carbon, hardened	3,150	10,335
Carbon Steel	3,230	10,598
Mild Steel	3,235	10,614
Steel, 1% Carbon	3,220	10,565
302 Stainless Steel	3,120	10,236
303 Stainless Steel	3,120	10,236
304 Stainless Steel	3,141	10,306
304L Stainless Steel	3,070	10,073
316 Stainless Steel	3,272	10,735
347 Stainless Steel	3,095	10,512
Aluminium	3,100	10,171
Aluminium (rolled)	3,040	9,974
Copper	2,260	7,415
Copper (annealed)	2,325	7,628
Copper (rolled)	2,270	7,448
CuNi (70%Cu 30%Ni)	2,540	8,334
CuNi (90%Cu 10%Ni)	2,060	6,759
Brass (Naval)	2,120	6,923
Gold (hard-drawn)	1,200	3,937
Inconel	3,020	9,909
Iron (electrolytic)	3,240	10,630
Iron (Armco)	3,240	10,630
Ductile Iron	3,000	9,843
Cast Iron	2,500	8,203
Monel	2,720	8,924
Nickel	2,960	9,712
Tin (rolled)	1,670	5,479
Titanium	3,125	10,253
Tungsten (annealed)	2,890	9,482
Tungsten (drawn)	2,640	8,661
Tungsten (carbide)	3,980	13,058
Zinc (rolled)	2,440	8,005
Glass (pyrex)	3,280	10,761
Glass (heavy silicant first)	2,380	7,808
Glass (light brate crown)	2,840	9,318
Nylon	1,150	3,772
Nylon, 6-6	1,070	3,510
Polyethylene (LD)	540	1,772
PVC, CPVC	1,060	3,477
Acrylic	1,430	4,690

* Please note these values are to be considered nominal. Solids may be inhomogeneous and anisotropic. Actual values depend on exact composition, temperature, and to a lesser extent, on pressure and stress.

All data given at 25 °C (77 °F) unless otherwise stated

Substance	Chemical Formula	Specific Gravity	Sound Speed		Change	Kinematic	Viscosity
			m/s	ft/s	v/°C	x10 ⁻⁶	ft ² /s
Acetic anhydride	(CH ₃ CO) ₂ O	1.082 (20 °C)	1,180	3,871.4	2.5	0.769	8.274
Acetic acid, anhydride	(CH ₃ CO) ₂ O	1.082 (20 °C)	1,180	3,871.4	2.5	0.769	8.274
Acetic acid, nitrile	C ₂ H ₃ N	0.783	1,290	4,232.3	4.1	0.441	4.745
Acetic acid, ethyl ester	C ₄ H ₈ O ₂	0.901	1,085	3,559.7	4.4	0.467	5.025
Acetic acid, methyl ester	C ₃ H ₆ O ₂	0.934	1,211	3,973.1		0.407	4.379
Acetone	C ₃ H ₆ O	0.791	1,174	3,851.7	4.5	0.399	4.293
Acetylene dichloride	C ₂ H ₂ Cl ₂	1.26	1,015	3,330.1	3.8	0.400	4.304
Alcohol	C ₂ H ₆ O	0.789	1,207	3,960	4.0	1.396	15.02
Ammonia	NH ₃	0.771	1,729 (33 °C)	5,672.6 (-27 °C)	6.68	0.292 (-33 °C)	3.141 (-27 °F)
Benzene	C ₆ H ₆	0.879	1,306	4,284.8	4.65	0.711	7.65
Benzol	C ₆ H ₆	0.879	1,306	4,284.8	4.65	0.711	7.65
Bromine	Br ₂	2.928	889	2,916.7	3.0	0.323	3.475
n-Butane(2)	C ₄ H ₁₀	0.601 (0°C)	1,085 (5° C)	3,559.7 (23 °C)	5.8		
2-Butanol	C ₄ H ₁₀ O	0.81	1,240	4,068.2	3.3	3.239	34.851
sec-Butylalcohol	C ₄ H ₁₀ O	0.81	1,240	4,068.2	3.3	3.239	34.851
n-Butyl bromide (46)	C ₄ H ₉ Br	1.276 (20°C)	1,019 (20°C)	3,343.2 (68°F)		0.49 (15°C)	5.272 (59°C)
n-Butyl chloride (22,46)	C ₄ H ₉ Cl	0.887	1,140	3,740.2	4.57	0.529 (15°C)	5.692 (59°F)
Carbon tetrachloride	CCl ₄	1.595 (20°C)	926	3038.1	2.48	0.607	6.531
Carbon tetrafluoride (Freon 14)	CF ₄	1.75 (-150 °C)	875.2 (150 °C)	2,871.5 (-238 °F)	6.61		
Chloroform	CHCl ₃	1.489	979	3,211.9	3.4	0.55	5.918
Dichlorodifluoromethane (Freon 12)	CCl ₂ F ₂	1.516 (40 °C)	774.1	2,539.7	4.24		
Ethanol	C ₂ H ₆ O	0.789	1,207	3,960	4.0	1.39	14.956
Ethyl acetate	C ₄ H ₈ O ₂	0.901	1,085	3,559.7	4.4	0.489	5.263
Ethyl alcohol	C ₂ H ₆ O	0.789	1,207	3,960	4.0	1.396	15.020
Ethyl benzene	C ₈ H ₁₀	0.867 (20 °C)	1,338 (20 °C)	4,89.8 (68 °F)		0.797 (17 °C)	8.575 (63 °F)
Ether	C ₄ H ₁₀ O	0.713	985	3231.6	4.87	0.311	3.346
Ethyl ether	C ₄ H ₁₀ O	0.713	985	3231.6	4.87	0.311	3.346
Ethylene bromide	C ₂ H ₄ Br ₂	2.18	995	3264.4		0.79	8.5
Ethylene chloride	C ₂ H ₄ Cl ₂	1.253	1,193	3,914		0.61	6.563
Ethylene glycol	C ₂ H ₆ O ₂	1.113	1,658	5439.6	2.1	17,208 (20°C)	185.158 (68°F)
Fluorine	F	0.545 (-143 °C)	403 (143 °C)	1322.2 (225 °F)	11.31		
Formaldehyde, methyl ester	C ₂ H ₄ O ₂	0.974	1,127	3697.5	4.02		
Freon R12			774.2	2540			
Glycol	C ₂ H ₆ O ₂	1.113	1658	5439.6	2.1		
50% Glycol/50% H ₂ O			1,578	5,177			
Isopropanol	C ₃ H ₈ O	0.785 (20 °C)	1,170 (20 °C)	3,838.6 (68 °F)		2.718	29.245
Isopropyl alcohol (46)	C ₃ H ₈ O	0.785 (20 °C)	1,170 (20 °C)	3,838.6 (68 °F)		2.718	29.245
Kerosene		0.81	1,324	4,343.8	3.6		
Methane	CH ₄	0.162 (-89 °C)	405 (-89 °C)	1,328.7 (-128 °F)	17.5		
Methanol	CH ₄ O	0.791 (20 °C)	1,076	3,530.2	292	0.695	7.478

Methyl acetate	C3H6O2	0.934	1,211	3,973.1		0.407	4.379
Methyl alcohol	CH4O	0.791	1,076	3,530.2	292	0.695	7.478
Methyl benzene	C7H8	0.867	1,328 (20 °C)	4,357 (68 °F)	4.27	0.644	7.144
Milk, homogenized			1,548	5,080			
Naphtha		0.76	1,225	4,019			
Natural Gas		0.316 (-103 °C)	753 (- 103 °C)	2,470.5 (-153 °F)			
Nitrogen	N2	0.808 (-199 °C)	962 (- 199 °C)	3,156.2 (-326 °F)		0.217 (- 199 °C)	2.334 (- 326 °F)
Oil, Car (SAE 20a.30)		1.74	870	2,854.3		190	2,045.093
Oil, Castor	C11H10O0	0.969	1,477	4,845.8	3.6	0.670	7.209
Oil, Diesel		0.80	1,250	4,101			
Oil, Fuel AA gravity		0.99	1,485	4,872	3.7		
Oil (Lubricating X200)			1,530	5,019.9			
Oil (Olive)		0.912	1,431	4,694.9	2.75	100	1,076.365
Oil (Peanut)		0.936	1,458	4,738.5			
Propane (-45 to -130 °C)	C3H8	0.585 (-45 °C)	1,003 (- 45 °C)	3,290.6 (-49 °F)	5.7		
1-Propanol	C3H8O	0.78 (20 °C)	1,222 (20 °C)	4,009.2 (68 °F)			
2-Propanol	C3H8O	0.785 (20 °C)	1,170 (20 °C)	3,838.6 (68 °F)		2.718	29.245
Propene	C3H6	0.563 (-13°C)	963 (- 13°C)	3159.4 (9°F)	6.32		
n-Propyl-alcohol	C3H8O	0.78 (20 °C)	1,222 (20 °C)	4,009.2 (68 °F)		2.549	27.427
Propylene	C3H6	0.563 (-13 °C)	963 (-13 °C)	3159.4 (9 °F)	6.32		
Refrigerant 11	CCl3F	1.49	828.3 (0 °C)	2,717.5 (32 °F)	3.56		
Refrigerant 12	CCl2F2	1.516 (-40 °C)	774.1 (- 40 °C)	2,539.7 (-40 °C)	4.24		
Refrigerant 14	CF4	1.75 (-150 °C)	875.24 (- 150 °C)	2,871.6 (-268 °F)	6.61		
Refrigerant 21	CHCl2F	1.426 (0 °C)	891 (0 °C)	2,923.2 (32 °F)	3.97		
Refrigerant 22	CHClF2	1.491 (-69 °C)	893.9 (50 °C)	2,932.7 (122 °F)	4.79		
Refrigerant 113	CCl2F-CClF2	1.563	783.7 (0 °C)	2,571.2 (32 °F)	3.44		
Refrigerant 114	CClF2-CClF2	1.455	665.3 (- 10 °C)	2,182.7 (14 °F)	3.73		
Refrigerant 115	C2ClF5		656.4 (- 50 °C)	2,153.5 (-58 °F)	4.42		
Refrigerant C318	C4F8	1.62 (-20 °C)	574 (-10 °C)	1,883.2 (14 °F)	3.88		
Sodium nitrate	NoNO3	1.884 (336 °C)	1,763.3 (336 °C)	5,785.1 (637 °F)	0.74	1.37 (336 °C)	14.74 (637 °F)
Sodium nitrite	NoNO2	1.805 (292 °C)	1876.8 (292 °C)	6157.5 (558 °F)			
Sulphur	S		1177 (250 °C)	3861.5 (482 °F)	-1.13		
Sulphuric Acid	H2SO4	1.841	1,257.6	4,126	1.43	11.16	120.081
Tetrachloroethane	C2H2Cl4	1553 (20 °C)	1,170 (20 °C)	3,838.6 (68 °F)		1.19	12.804
Tetrachloro-ethene	C2Cl4	1.632	1,036	3,399			
Tetrachloro-Methane	CCl4	1.595 (20 °C)	926	3,038.1		0.607	6.531

Tetrafluoro-methane (Freon 14)	CF4	1.75 (-150 °C)	875.24 (-150 °C)	2,871.5 (-283 °F)	6.61		
Toluene	C7H8	0.867 (20 °C)	1,328 (20 °C)	4,357 (68 °F)	4.27	0.644	6.929
Toluol	C7H8	0.866	1,308	4,291.3	4.2	0.58	6.24
Trichloro-fluoromethane (Freon 11)	CCl3F	1.49	828.3 (0 °C)	2,717.5 (32 °F)	3.56		
Turpentine		0.88	1,255	4,117.5		1.4	15.064
Water, distilled	H2O	0.996	1,498	4,914.7	-2.4	1.00	10.76
Water, heavy	D2O		1,400	4,593			
Water, sea		1.025	1531	5023	-2.4	1.00	10.76

Temperature		Sound Speed in Water	
°C	°F	m/s	ft/s
0	32.0	1402	4600
1	33.8	1407	4616
2	35.6	1412	4633
3	37.4	1417	4649
4	39.2	1421	4662
5	41.0	1426	4679
6	42.8	1430	4692
7	44.6	1434	4705
8	46.4	1439	4721
9	48.2	1443	4734
10	50.0	1447	4748
11	51.8	1451	4761
12	53.6	1455	4774
13	55.4	1458	4784
14	57.2	1462	4797
15	59.0	1465	4807
16	60.8	1469	4820
17	62.6	1475	4830
18	64.4	1476	4843
19	66.2	1479	4853
20	68.0	1482	4862
21	69.8	1485	4872
22	71.6	1488	4882
23	73.4	1491	4892
24	75.2	1493	4899
25	77.0	1496	4908
26	78.8	1499	4918
27	80.6	1501	4925
28	82.4	1504	4935
29	84.2	1506	4941
30	86.0	1509	4951
31	87.8	1511	4958
32	89.6	1513	4964
33	91.4	1515	4971
34	93.2	1517	4977
35	95.0	1519	4984
36	96.8	1521	4984
37	98.6	1523	4990
38	100.4	1525	4997

39	102.2	1527	5010
40	104.0	1528	5013
41	105.8	1530	5020
42	107.6	1532	5026
43	109.4	1534	5033
44	111.2	1535	5036
45	113.0	1536	5040
46	114.8	1538	5046
47	116.6	1538	5049
48	118.4	1540	5053
49	120.2	1541	5056
50	122.0	1543	5063
51	123.8	1543	5063
52	125.6	1544	5066
53	127.4	1545	5069
54	129.2	1546	5072
55	131.0	1547	5076
56	132.8	1548	5079
57	134.6	1548	5079
58	136.4	1548	5079
59	138.2	1550	5086
60	140.0	1550	5086
61	141.8	1551	5089
62	143.6	1552	5092
63	145.4	1552	5092
64	147.2	1553	5092
65	149.0	1553	5095
66	150.8	1553	5095
67	152.6	1554	5099
68	154.4	1554	5099
69	156.2	1554	5099
70	158.0	1554	5099
71	159.8	1554	5099
72	161.6	1555	5102
73	163.4	1555	5102
74	165.2	1555	5102
75	167.0	1555	5102
76	167.0	1555	5102
77	170.6	1554	5099
78	172.4	1554	5099
79	174.2	1554	5099
80	176.0	1554	5099
81	177.8	1554	5099
82	179.6	1553	5095
83	181.4	1553	5095
84	183.2	1553	5095
85	185.0	1552	5092
86	186.8	1552	5092
87	188.6	1552	5092
88	190.4	1551	5089
89	192.2	1551	5089
90	194.0	1550	5086
91	195.8	1549	5082
92	197.6	1549	5082

93	199.4	1548	5079
94	201.2	1547	5076
95	203.0	1547	5076
96	204.8	1546	5072
97	206.6	1545	5069
98	208.4	1544	5066
99	210.2	1543	5063
100	212.0	1543	5063
104	220.0	1538	5046
110	230.0	1532	5026
116	240.0	1524	5000
121	250.0	1526	5007
127	260.0	1507	4944
132	270.0	1497	4912
138	280.0	1487	4879
143	290.0	1476	4843
149	300.0	1465	4807
154	310.0	1453	4767
160	320.0	1440	4725
166	330.0	1426	4679
171	340.0	1412	4633
177	350.0	1398	4587
182	360.0	1383	4538
188	370.0	1368	4488
193	380.0	1353	4439
199	390.0	1337	4387
204	400.0	1320	4331
210	410.0	1302	4272
216	420.0	1283	4210
221	430.0	1264	4147
227	440.0	1244	4082
232	450.0	1220	4003
238	460.0	1200	3937
243	470.0	1180	3872
249	480.0	1160	3806
254	490.0	1140	3740
260	500.0	1110	3642

Thank you for purchasing the Arrow Hunter PLUS - BTU
Please call if you have any questions or need technical support.



ECHO Process Instrumentation, Inc.
Mail to: PO Box 800, Shalimar, FL 32579 USA
Ship to: 70 6th Ave, Shalimar, FL 32579 USA
Phone: 850-609-1300 Fax: 850-651-4777
Email: info@echopi.com Website: www.echopi.com